

L-SERIES & S-SERIES CHIMNEY CAPS




Specifications

Model	Chimney Pipe		Pipe Diameter		Chimney Cap Dimensions	Flashing Kit (VFK)	Design Certified
	"L" Series	"S" Series	Flue	Outer Pipe			
SC		X	8"	11"	18-1/2" (Dia.) x 14-1/4" H	N/A	UL
LC	X		11"	13"	18-1/2" (Dia.) x 15-1/4" H	N/A	UL
SPC		X	8"	11"	20-1/2" (Bot.) W x 16" (Top) W x 17-1/4" H	Not Required	UL
LPC	X		11"	13"	20-1/2" (Bot.) W x 16" (Top) W x 17-1/4" H	Not Required	UL
CF8		X	8"	11"	18" (Bot.) W x 20" (Top) W x 18-5/8" H	Required	UL
CF11	X		11"	13"	18" (Bot.) W x 20" (Top) W x 18-5/8" H	Required	UL
SCL		X	8"	11"	18-1/2" (Dia.) x 24-3/4" H (w/telescope)	Not Required**	UL
LCL	X		11"	13"	18-1/2" (Dia.) x 33-1/4" H (w/telescope)	Not Required**	UL
SQ8		X	8"	11"	21-1/4" (Dia.) x 13" H	Required	UL
LFSQT	X	X	8" or 11"	11" or 13"*	24" (Bot.) W x 21" (Top) W x 19-11/16" H	Required	UL

* May be used with "L" or "S" Series pipe. Requires telescope assembly S8 or TL.

** VFK required only when using field constructed shroud.

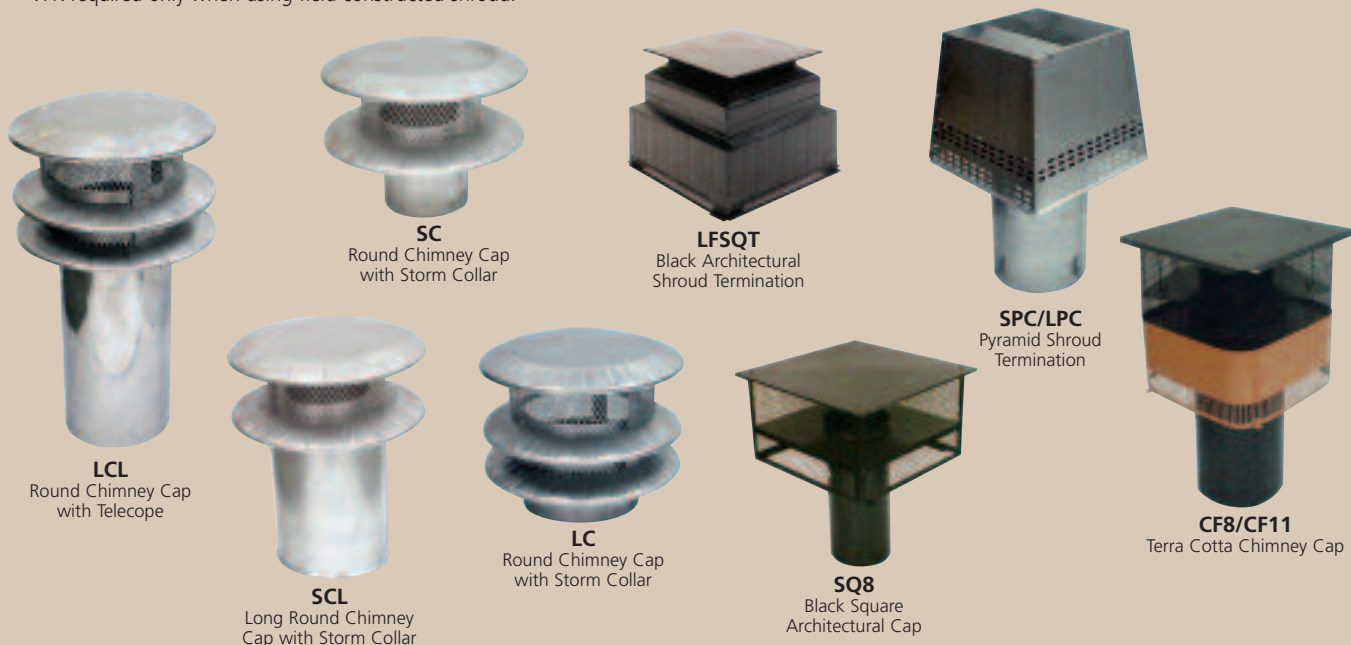

Tested & Listed By



Seawerton Oregon USA



Monessen

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361

www.monessenhearth.com

Your Monessen Dealer:

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2008 Monessen Hearth Systems Co.

Ver.01 MON9408