




# HBZDV3624/28, HBZDV4224/28

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE

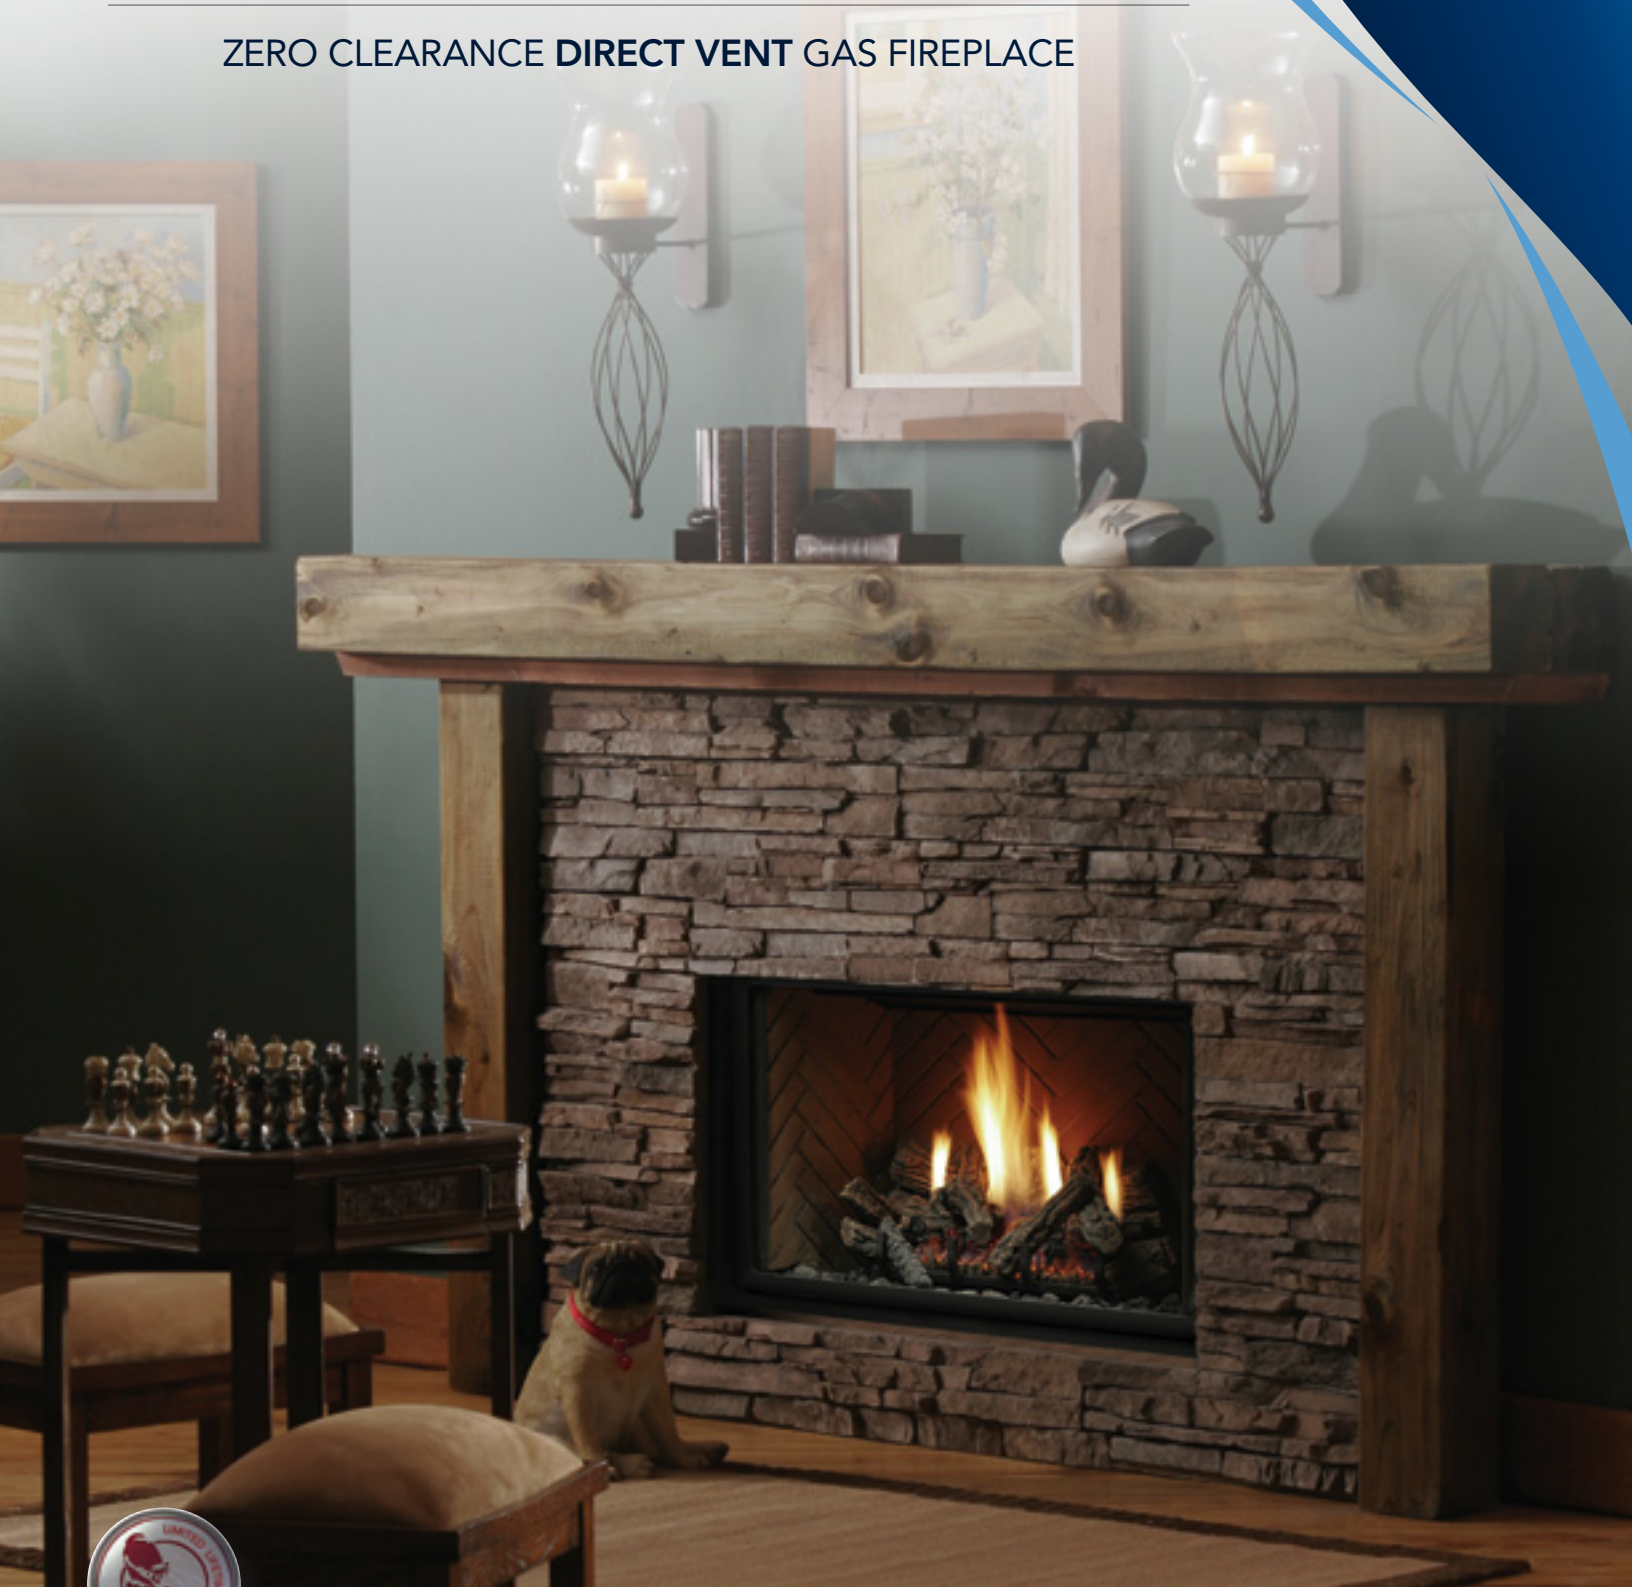

The Ultimate in Design, Engineering & Quality

This unit illustrated is a HBZDV3628N with HB36CVCK Designer Clean View Kit, LOGC44 Log Set and Optional HB36RLH Herring Bone Refractory Liner.



# DESIGNER CLEAN VIEW™ or LOUVERED FIREPLACES

Kingsman's Direct Vent models are easily adaptable to our patented Designer Clean View technology or standard louvers.

Enjoy an incredible line of options and styles – from contemporary to classic – plus the beauty and pleasure of a cozy fire.



## The Ultimate in Design, Engineering & Quality

- A Model HBZDV3628N with HB36GBL Black Grill, LOGC44 Log Set, Optional HB36RLH Herring Bone Refractory Liner, HB36ADDX Deluxe Arch Door
- B Model HBZDV4228N, HB42CVCK Designer Clean View Kit, LOGC43 Log Set, Optional HB42RLT Traditional Refractory Liner and HB42DDA1BL Designer Arch Door
- C Model HBZDV3628N with HB36CVCK Designer Clean View Kit, LOGC44 Log Set, Optional HB36RLT Traditional Refractory Liner, HB36DDS1BL Designer Straight Door.






# The Ultimate in Zero Clearance Direct Vent Fireplaces for New Home Construction or Renovation

**YOUR BEST CHOICE FOR INSTALLATION ANYWHERE THROUGHOUT YOUR HOME.**

## CORNER FRAMING DIMENSIONS (INCHES)

	LOUVERED		CLEAN VIEW CIRCULATING KIT (CVCK)	
	HBZDV36	HBZDV42	HBZDV36	HBZDV42
A	54 <sup>13/16"</sup>	58 <sup>13/16"</sup>	59 <sup>7/8"</sup>	63 <sup>13/16"</sup>
B	36 <sup>3/8"</sup>	42 <sup>3/8"</sup>	38 <sup>7/16"</sup>	42 <sup>7/16"</sup>
C	36"	42"	38 <sup>1/16"</sup>	42 <sup>1/16"</sup>
D	9 <sup>3/16"</sup>	8 <sup>1/4"</sup>	10 <sup>11/16"</sup>	10 <sup>1/16"</sup>
E	38 <sup>3/4"</sup>	41 <sup>5/8"</sup>	42 <sup>5/16"</sup>	45 <sup>1/8"</sup>
F	12 <sup>3/8"</sup>	13 <sup>3/4"</sup>	12 <sup>3/8"</sup>	13 <sup>3/4"</sup>
G	17 <sup>9/16"</sup>	19 <sup>1/2"</sup>	17 <sup>9/16"</sup>	19 <sup>1/2"</sup>
H	27 <sup>3/8"</sup>	29 <sup>7/16"</sup>	29 <sup>15/16"</sup>	31 <sup>7/8"</sup>

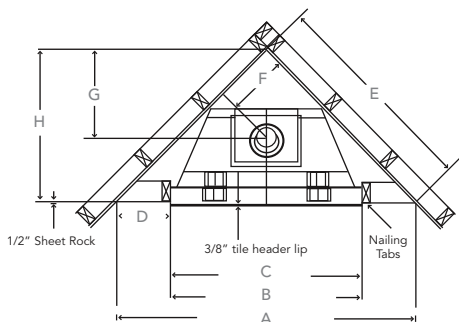

## UNIT AND FRAMING SPECIFICATIONS (INCHES)

TOP FLUE MODELS	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
<b>LOUVERS</b>						
HBZDV36	34 <sup>13/16"</sup>	35"	36"	36 <sup>3/8"</sup>	16 <sup>7/16"</sup>	17"
HBZDV42	37"	37 <sup>1/8"</sup>	41 <sup>7/8"</sup>	42 <sup>3/8"</sup>	16 <sup>7/16"</sup>	17"

<b>CLEAN VIEW CIRCULATING KIT (CVCK)</b>						
HBZDV36	34 <sup>11/16"</sup>	41"	38 <sup>1/16"</sup>	38 <sup>7/16"</sup>	18 <sup>7/8"</sup>	19 <sup>1/2"</sup>
HBZDV42	36 <sup>13/16"</sup>	43"	42 <sup>1/16"</sup>	42 <sup>7/16"</sup>	18 <sup>15/16"</sup>	19 <sup>1/2"</sup>

TOP FLUE MODELS	Width	Height
<b>VIEWING AREA</b>		
HBZDV36	29 <sup>3/4"</sup>	18 <sup>5/8"</sup>
HBZDV42	33 <sup>3/8"</sup>	20 <sup>3/8"</sup>

MODEL	HBZDV3624N	HBZDV3628N	HBZDV3624LP	HBZDV3628LP
	HBZDV4224N	HBZDV4228N	HBZDV4224LP	HBZDV4228LP
FLUE	TOP	TOP	TOP	TOP
FUEL	NATURAL	NATURAL	PROPANE	PROPANE
INPUT MAX.	24,000 BTU	28,000 BTU	22,000 BTU	26,000 BTU
INPUT MIN.	14,000 BTU	20,000 BTU	15,000 BTU	19,000 BTU
OUTPUT MAX.	-	21,000 BTU	15,000 BTU	19,500 BTU
EFFICIENCY	-	76% FAN ON	-	76% FAN ON
FE (P.4.1-02)	51.0%/44.7%	58.7%/57.7%	46.0%/47.9%	62.4%/58.6%

## STANDARD FEATURES

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed

## OPTIONAL FEATURES

**Designer Clean View Circulating Kit** – (No Louvers Required), Optional Pull Screens

**Decorative Black Panels or Grills** – Grills available in Black, or Classic Series Black with Polish Brass, Antique or Chrome Accents

**Overlay Doors** – Deluxe, Top Half, Double Arch and Double Door

**Designer Doors** – Arch or Straight Black Doors with Antique, Polished or Chrome Trims

**Surrounds Wide** (Louvered Units) - Polish Brass, Antique or Chrome

**Coverage** – **HBZDV3624/28** – 35<sup>1/2"</sup> h x 41<sup>1/8"</sup> w

**HBZDV4224/28** – 37<sup>5/8"</sup> h x 45<sup>1/8"</sup> w

**Surrounds Slim Line** (Louvered Units) - Polish Brass, Antique Brass, Chrome or Gun Metal Black,

**Coverage** – **HBZDV3624/28** – 35<sup>1/4"</sup> h x 37<sup>1/2"</sup> w

**HBZDV4224/28** – 37<sup>3/8"</sup> h x 43<sup>3/8"</sup> w

**Fan Kit** – Heat activated with variable speed control

**Brick Refractory Liner** – Traditional, Herringbone, and Classic (H36 Models Only)

**Thermostat** – Wall Mount Millivolt Thermostat or Programmable Thermostat

**Remote Control** – On/Off, Thermostat On/Off, Hi/Lo On/Off

**Child Safety Screen**

**Log Sets** – Choose from our LOGC42 Classic Oak Four Piece or LOGC43 Traditional Oak Four Piece or LOGC44 Burnt Oak Eight Piece Log Sets



Kingsman Industries maintains a program of continuous testing refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: The Model HBZDV3624/4224 are certified to ANSI Z21.50a-2000/CSA 2.22a-2000, CGA 2.17-M91, CSA P.4.1-02 vented gas fireplace. The models HBZDV3628/4228 are certified to ANSI Z21.88b-2003/CSA-2.33b-2003, CAN/CGA 2.17-M91, CSA P.4.1-02 vented gas fireplace heater.



2340 Logan Avenue  
Winnipeg, Manitoba, Canada R2R 2V3  
Phone: (204) 632-1962 Fax: (204) 632-1960  
[www.kingsmanfireplaces.com](http://www.kingsmanfireplaces.com)